

ROHS

REV

DESCRIPTION


DATE

APPROVED

A



INITIAL RELEASE

2022. 3. 14



技术要求:

1. 产品需100%短断路测试;
2. 导体电阻:3 ohm (MAX);
3. 绝缘电阻:DC 300V 100M ohm (MIN);
4. 额定电流: 4A;
5. 插拔寿命: 500次;
6. 产品外观无沾污, 缩水, 冲胶、变形、杂色等不良;
7. 所有材料需符合ROHS环保标准;

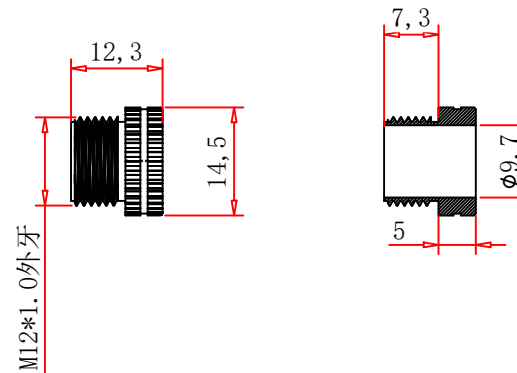

General Tolerance


DIMENSION:

X.X ±0.5

X.XX ±0.2

X.XXX ±0.1

Cable length:±2%
ANGLE:±5°



Customer Code

Drawing NO.

Publish NO.

SHEET:

TITLE.

Approve By

Check By

Drawn By

DATE

SCALE:

Units:



深圳市视壹唯电子科技有限公司
Shenzhen Eonly electronic technology Co.,Ltd

Customer P/O.

Customer P/N.

M12 A型 4P公头连接器

Wu KaiPin

2022.3.14

NONE

mm

3 螺丝 M12公头螺丝, Ø14.5*12.3*9.7mm (黄铜镀镍) PCS 1

2 端子 M12 公头焊线式Ø1.0公针端子 (Ø1.6*20.5*1.0) 黄铜镀金1U PCS 4

1 胶芯 M12 4PIN公头胶芯, 材质: PA66+15%GF 黑色 PCS 1

序 号	物料名称	物料规格	单位	用量
-----	------	------	----	----

1

2

3

4

5

6